

WE-AS2700

Structure aluminium alloy and steel

Reduction unit with worm wheel and irreversible worm-screw (reverse motion is possible only when the operator acts on the relevant controls, therefore no negative brake is required).

Reduction ratio: - 50:1 (total ratio 290:1) line speed about 4m/min
- 38:1 (total ratio 213:1) line speed about 5m/min


Versions of the motor: single-phase 220V or three-phase 380V

Wired remote control button board (CE suitable)

Line speed, line pull, drum rope capacity: see following page

Zinc-plated steel fairlead rollers unit.

Total weight w/out rope: 40 kg.

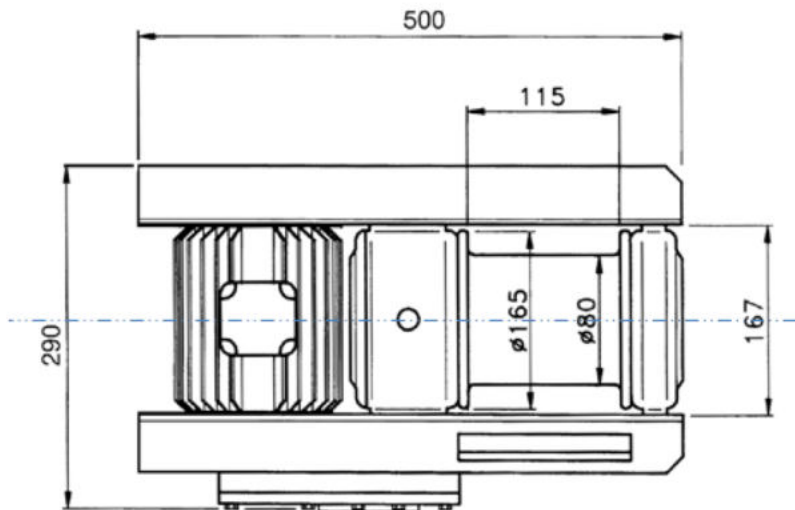

- ① Oil filling plug
- ② Oil level plug
- ③ Oil emptying plug

